


ZIP HYDROTAP G4 BCS 100/75

Order Code HT1760

Zip HydroTap Boiling, Chilled, Sparkling, Filtered water appliance featuring a single under bench command centre including full colour interactive touch screen display with pin code protection, 2 boiling water safety modes, 3 energy saving modes including sensor activated "sleep when its dark", 0.2 micron water filtration and a refillable CO2 cylinder.



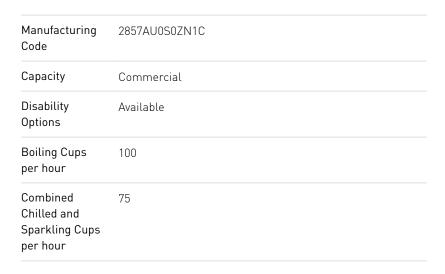

Тар	Zip HydroTap CLASSIC Tap (Chrome)
Water Pressure	Min 172kPa - Max 700kPa
Water Connection	12.7mm BSP
Water Supply Requirements	Cold
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Power Rating	2.125kW 220-240V 50/ 60Hz
Power Supply	1 x 10Amp GPO
Dimensions	H333mm x W338mm x D461mm
Product Approvals	WaterMark, CE, RCM, ARC

Installation Requirements

- "1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
- 2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.
- 3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.
- 4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service
- 5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
- 6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com"

Installation Detail

